

By Request

Stock Colours

				2335-2016 Onyx	2335-2027 Wolf	2335-2664 White
2335-2036 Aubergine	2335-2843 Orchid	2335-2044 Mulberry	2335-2091 Poppy	2335-2014 Red Delicious	2335-2084 Geranium	2335-2021 Pumpkin
2335-2090 Goldenrod	2335-2034 Straw	2335-2082 Sunshine	2335-2839 Lemon	2335-2087 Green Apple	2335-2047 Eucalyptus	2335-2028 Willow
2335-2840 Fern	2335-2022 Pine Needle	2335-2051 Deep Water	2335-2841 Turquoise	2335-8703 Bay	2335-2691 Waterfall	2335-8586 Fog
2335-8585 Foam	2335-8578 North Star	2335-8579 Dew	2335-2842 Pool	2335-2085 Thistle	2335-2094 Lapis	2335-2045 Cobalt
2335-2025 Midnight	2335-2026 Quarry Blue	2335-2017 Slate	2335-8575 Overcast	2335-2079 Graphite	2335-2053 Asteroid	2335-6694 Shadow
2335-8583 Dune	2335-8572 Shell	2335-8573 Pearl	2335-8570 Drift	2335-2083 Coffee Bean	2335-2093 Fossil	2335-2049 Goose
2335-2050 Cumin	2335-2035 Angora	2335-2130 Vanilla	2335-2129 Birch			



Guilford of Maine

A duvaltex brand

Our Signature Suite fabric options are provided by Guilford of Maine - a pioneer in the development of acoustic fabric materials, that, to this day, still set the benchmark for sound absorption. Their fabrics are renowned for their exceptional value and consistency, and require minimal upkeep to stay looking as good as the day they were installed. With a wide range of colours on offer, you can create a completely customized look and feel, combining flexibility, functionality, and aesthetic excellence.

Primacoustic Signature Suite acoustic panels are manufactured and wrapped in North America.

Stock Colours

Stock colours are available to order immediately, with a short lead time. 'By Request' colours will have a longer lead time.

All custom-wrapped panels are made to order, and a minimum order quantity may apply.

Fabric Specifications

For panel specifications, Please refer to the Engineering Data Sheet for your chosen product.

Content: 100% recycled and recyclable. 65% pre-consumer recycled polyester. 35% post-consumer recycled polyester.



Weight: 15.0 ± 1 oz./lin. yd

Colourfastness to light (AATCC 1.6.3 Option 3):
Grade 4 min. at 40 hours

Colourfastness to crocking (AATC 8):
Grade 4 min. dry & Grade 3 min. wet

Will contribute to meeting LEED and WELL standards.



Made in North America

Testing

Sound Absorption

Acoustic Transparency: 85%

NRC: 2" (51mm) - 1.10

125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC
0.47	0.85	1.24	1.19	1.20	1.11	1.10

Fire Safety

Flammability

(Fabric + Broadway Panel):

CAN/ULC-S102-18 - Class A

ASTM E84 - Class A/1


Cleaning & Maintenance

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.


May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

For more information, please contact your Primacoustic Sales Representative
For more detailed testing results, please consult guilfordofmaine.com

Stock Colours

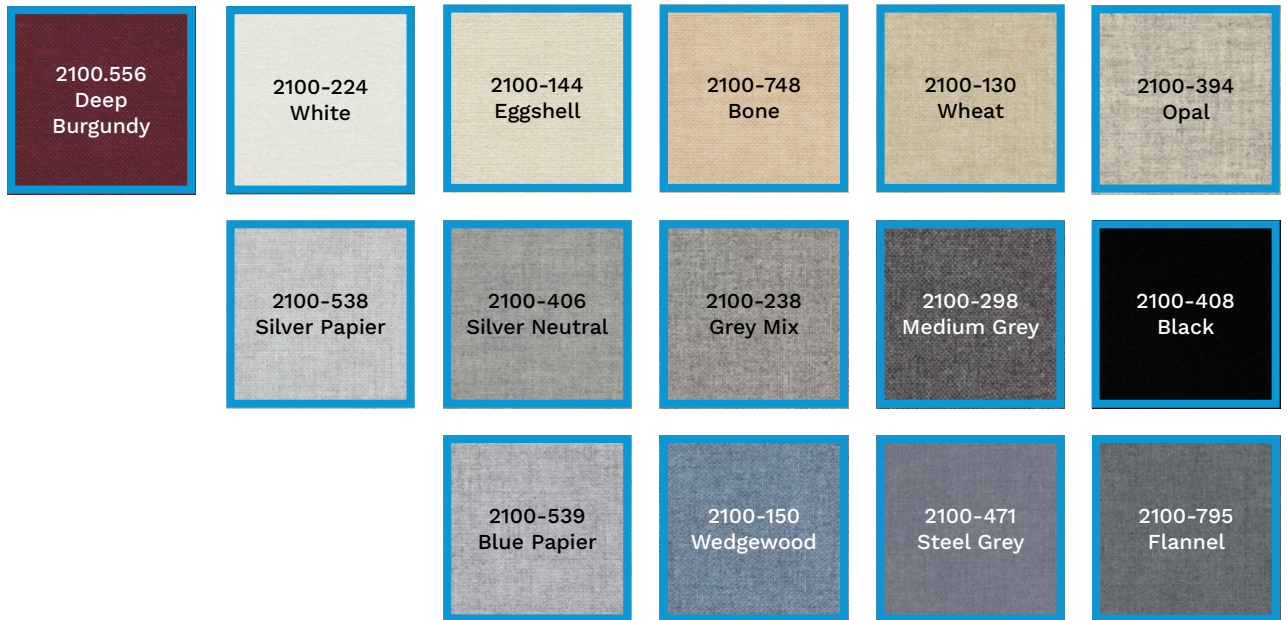

By Request

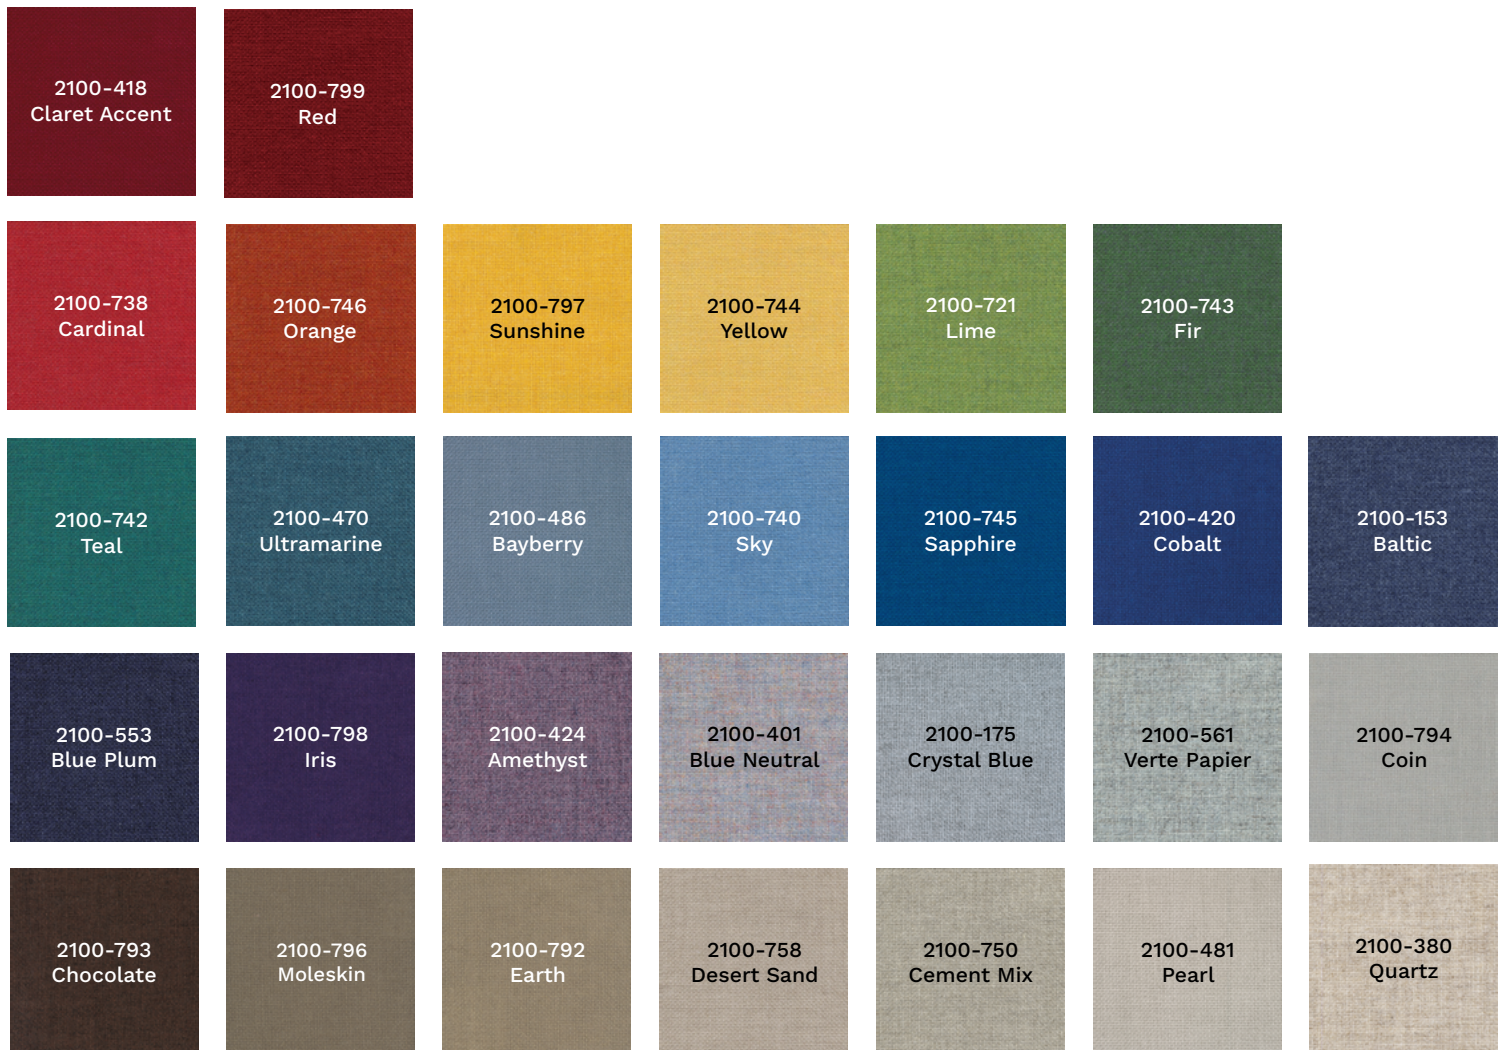

**Guilford of Maine**

A duvaltex brand

Our Signature Suite fabric options are provided by Guilford of Maine - a pioneer in the development of acoustic fabric materials, that, to this day, still set the benchmark for sound absorption. Their fabrics are renowned for their exceptional value and consistency, and require minimal upkeep to stay looking as good as the day they were installed. With a wide range of colours on offer, you can create a completely customized look and feel, combining flexibility, functionality, and aesthetic excellence.

Primacoustic Signature Suite acoustic panels are manufactured and wrapped in North America.

Stock Colours

Stock colours are available to order immediately, with a short lead time. 'By Request' colours will have a longer lead time.

All custom-wrapped panels are made to order, and a minimum order quantity may apply.

Fabric Specifications

For panel specifications, Please refer to the Engineering Data Sheet for your chosen product.

Content: 100% recycled and recyclable. 100% post-consumer recycled polyester.



Weight: 16.0 ± 0.5 oz./lin. yd

Colourfastness to light
(AATCC 1.6.3 Option 3):

Grade 4 min. at 40 hours

Colourfastness to crocking
(AATC 8):

Grade 4 min. dry & Grade 3 min. wet

Will contribute to
meeting LEED
and WELL standards.



Made in North America

Testing

Sound Absorption

Acoustic Transparency: 95%

NRC: 2" (51mm) - 1.10

125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC
0.40	0.74	1.24	1.25	1.22	1.14	1.10

Fire Safety

Flammability

(Fabric + Broadway Panel):

CAN/ULC-S102-18 - Class A

ASTM E84 - Class A/1

Cleaning & Maintenance

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

For more information, please contact your Primacoustic Sales Representative

For more detailed testing results, please consult guilfordofmaine.com