


PET Acoustic Clouds



EcoScapes Clouds are functional when it comes to superior sound absorption, as well as fashionable when it comes to matching the colours and décor of your room or space.

EcoScapes clouds are made from PET, an environmentally-friendly acoustic treatment material that doesn't compromise on sound absorption performance. And EcoScapes clouds don't compromise on design either, available in a wide range of colours for matching the decor of your room. Panels can be easily cut to size as well, creating a cloud solution that addresses both sound absorption and design needs.

Environmentally-friendly EcoScapes panels contain no formaldehyde, VOCs, glues or binders. They are also odourless, non-allergenic, and safe to handle without protective equipment. The high-density panels are impact resistant, inert and durable, meaning they should stand up to years of use without noticeable wear or discolouration.

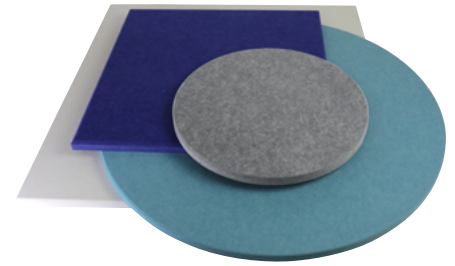

Construction

Materials: Heat-bonded PET fibres

Density: 11lb/ft³ (176.20kg/m³)

Recyclable: Panel constructed with up to 50% post-consumer PET. 100% recyclable. Off-cuts and manufacturing waste are recycled where possible.

No VOCs, No binders, No Formaldehyde. Odourless, Non-allergenic and Non-irritant. Does not shed. Safe to handle without protective equipment.

Available Options

Dimensions

Round

ø18" (ø457mm)

ø33" (ø838mm)

ø47.2" (ø1,200mm)

Square

33 x 33" (838 x 838mm)

47.2 x 47.2" (1,200 x 1,200mm)

Edge Types




Micro-Beveled Edge

Thickness

1" (25mm)

Available Finishes

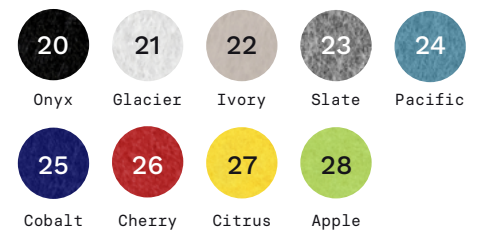

Testing

Sound Absorption

ASTM C423

A-Mount - NRC: 0.75

Test conducted on an EcoScapes panel mounted directly to a wall

D20-Mount - NRC: 0.85

Test conducted on an EcoScapes panel mounted on 3/8" thick furring strips, spaced 12" apart. Cavities left empty.

Fire Safety

ASTM E84 - Class A

EN13501-1 - Class B

Accolades



Installation and Maintenance

Suggested tools: Utility Knife, Circular Saw/Band Saw, Straight Edge Guide, Measuring Tape

Method

Suspending from Ceiling:

Primacoustic offers a range of bespoke hardware, for suspending EcoScapes panels from most common ceiling types.

PET panels can be cut to size with a utility knife or circular/band saw, to fit tight spaces or to further customize your project.

Maintenance

EcoScapes panels are easy to clean and take care of. PET should not shed or break down over time. Surface dirt and dust can be removed with a duster or vacuum cleaner without damaging the panel, while carpet or upholstery shampoo should remove most stains.






Warranty

Primacoustic acoustic products are guaranteed to be free of manufacturing defects for a period of 3 years after purchase. Please visit www.primacoustic.com/service-warranty for more information.



BIM data available at www.primacoustic.com/bim-library

**Due to the nature of the manufacturing process, and finished materials, slight colour variation may occur and is within commercial manufacturing tolerances.*

	SKU	Finish Options	Diameter	Thickness	Edge Type	Pack Qty
18" Round 	E250-1218-XX	20, 21, 22, 23, 24, 25, 26, 27, 28	18" (457mm)	1" (24mm)	Micro-Beveled	4
33" Round 	E250-1233-XX	20, 21, 22, 23, 24, 25, 26, 27, 28	33" (838mm)	1" (24mm)	Micro-Beveled	2
33" Square 	E250-1033-XX	20, 21, 22, 23, 24, 25, 26, 27, 28	33" (838mm)	1" (24mm)	Micro-Beveled	2
4' Round 	E250-1248-XX	20, 21, 22, 23, 24, 25, 26, 27, 28	47.2" (1,200 mm)	1" (24mm)	Micro-Beveled	2
4' Square 	E250-1048-XX	20, 21, 22, 23, 24, 25, 26, 27, 28	47.2" (1,200mm)	1" (24mm)	Micro-Beveled	2